


ELEMENT

- Classic dimout fabric with a colour matched reverse for a uniform appearance inside and out
- Standard 100 by Oeko-Tex® certified, free from harmful substances

APPLICATIONS

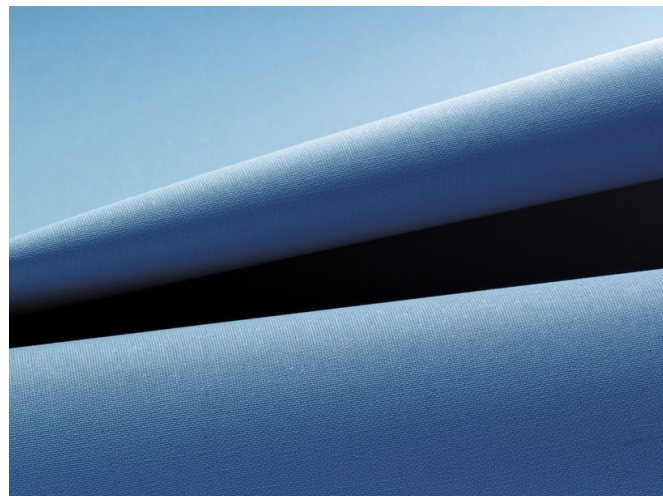

FABRIC PROPERTIES

	Dimout
	Polyester acrylic-coated
	220 g/m ²
	0.30 mm
	235 cm, 295 cm (01, 02, 04, 17)
	8.9 cm, 12.7 cm, 240 cm, 300 cm (01, 02, 04, 17)

WASHING INSTRUCTIONS



FEATURES / TECHNICAL PROPERTIES

	5-6
	Flame retardant
	Digital printing
	Oeko-Tex
	Special colours from 500 m

FLAME RETARDANT

B-s2,d0 (EN 13501-1)
 B1 (DIN 4102-1)
 M1 (NF P 92-503/5/7)
 Type B (BS 5867-2)



Element

OPTICAL AND SOLAR COEFFICIENTS ($\pm 5\%$, DIN EN 410)

Colour	T_V	T_S	R_S	A_S	T_{UV}	F_C	g_{tot}
01	15.0	17.0	73.0	10.0	2.0	0.47	0.34
02	5.0	10.0	51.0	39.0	0.00	0.60	0.43
04	13.0	17.0	63.0	20.0	0.00	0.53	0.38
15	3.0	10.0	55.0	35.0	0.00	0.58	0.41
17	0.5	0.5	19.0	80.5	0.00	0.80	0.58
18	3.0	2.0	36.0	62.0	0.00	0.69	0.50
23	0.5	6.0	37.0	57.0	0.00	0.69	0.49

T_V Visible light transmission

R_S Solar reflectance

T_{UV} UV transmission

g_{tot} Total g-value


T_S Solar transmission

A_S Solar absorption

F_C Shading factor

$F_C + g_{tot}$: Value calculated with glass: $0.72 / U_g = 1.6 \text{ W/m}^2 \text{ K}$, DIN EN 13363-1

Element

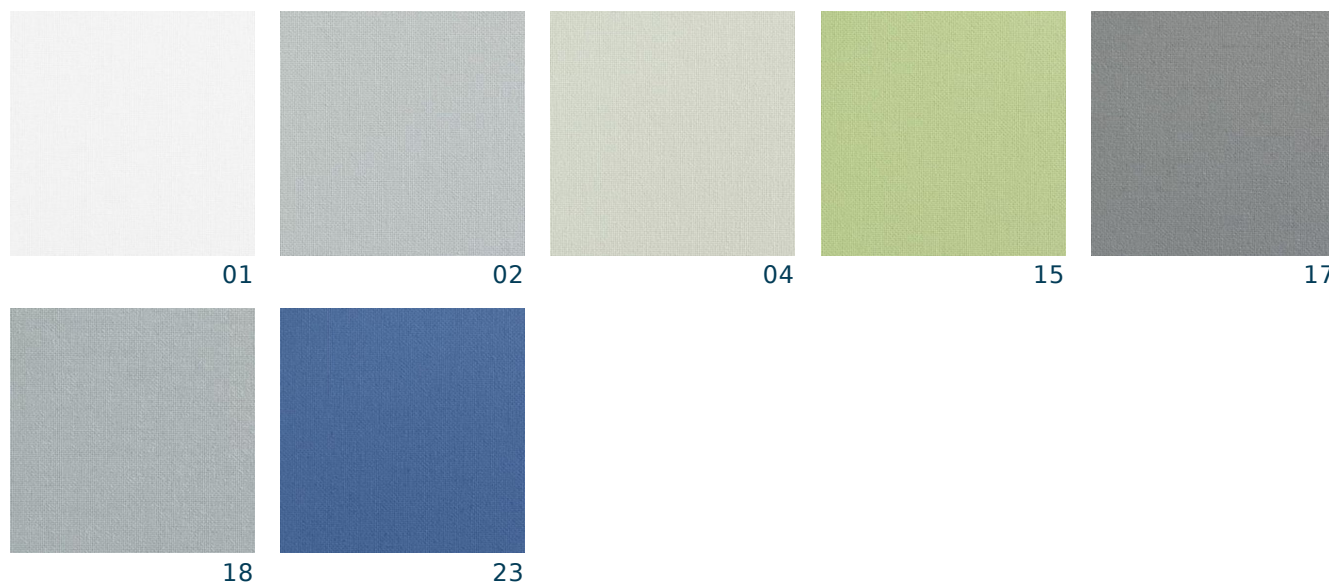

Colours shown are not binding